

Thermo Elasto-Hydrodynamic Contact Element and its Implementation to a Commercial Fem Software

Szabolcs Szávai¹, Sándor Kovács²

¹ PhD., Associate Professor,

Institute of Machine and Product Design, University of Miskolc

² PhD., Research Fellow,

Department of Structural Integrity, Bay Zoltán Nonprofit Ltd. for Applied Research

ABSTRACT: *Although several methods have been already developed for solving thermo elasto-hydrodynamic (TEHD) problems, the solution of the highly nonlinear problem is still quite challenging. So the development of a P-version FEM model for calculating the film shape, the pressure and temperature distribution and its implementation to commercial software seems to be timely to study the sliding-rolling materials during operation. Since the general 3D flow problem can be reduced to a quasi 2D case based on the hydrodynamic lubrication theory developed by Reynolds, special lubricant film element can be developed for finite-element modelling of such problems.*

Keywords: Elasto-hydrodynamic lubrication, Finite Element Method, Lubricant film element

1. INTRODUCTION

The generalized case of surface pairs contacting along a spot in the status of liquid friction is illustrated in Figure 1. In the solution of a differential equation by variation method, the equation is put into an equivalent weighted-integral form and then the approximate solution over the domain is assumed to be linear combination ($\sum_j c_j \phi_j$) of appropriately chosen approximation function ϕ_j and undetermined coefficient, c_j . The coefficient c_j are determined such that the integral statement equivalent to the original differential equation is satisfied. Weak solution of the weighted integral forms of the governing Reynold and energy equations has been presented by Szávai [3] for TEHD problems. In this paper is enough to assume that the weighted-integral forms of the Reynold and energy equations look like:

$$\int_{A_c} w_R \cdot R_{Reynolds} \cdot dA = 0 \quad (1)$$

$$\int_{A_c} \int_{h_1}^{h_2} w_Q \cdot R_{energy} dz \cdot dA = 0 \quad (2)$$

The film shape can be calculated as a superposition of the initial geometry, the displacement of a rigid surface and the deformation of a half-space under pressure. After deformation, the film shape:

$$h = h_{g2} + \Delta_{rigid1} + \Delta_{rigid2} + \delta_1 + \delta_2 = h_g + \Delta_{rigid} + \delta \quad (3)$$

where h_g is the initial gap size, Δ_{rigid} is the relative rigid normal displacement between the contact bodies, δ is the total deformation of the surfaces.

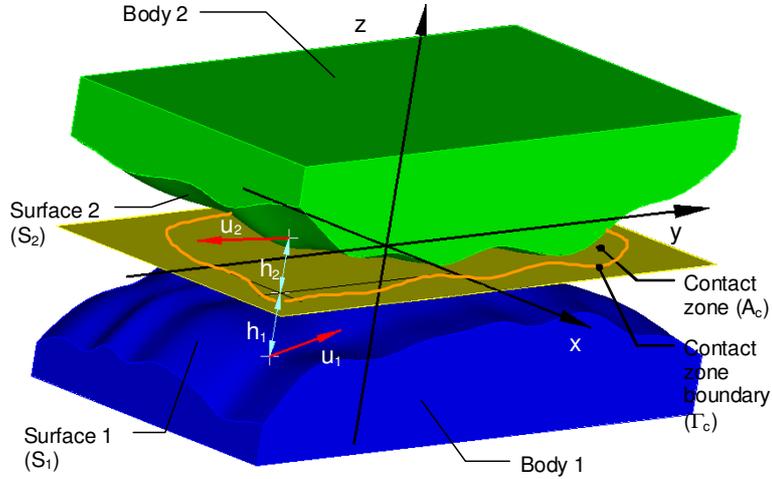


Figure 1 Contacting bodies

The calculation of displacements occurring under the effect of the distributed load acting on the surface is already a routine task in the range of numerical methods by now thus the equations needed for this will not be detailed either. The classical approach is to find the stresses and displacement in an elastic half-space due to surface traction [2]. Let us assume for the solution of this problem that the equation below is in existence:

$$L_{p_i}(p(x, y), \delta_{p_i}(x, y)) = 0 \quad (4)$$

For calculating the temperature of the contact surfaces range of numerical methods are available or the solution for moving heat source on semi-infinite half space [1] can be used as the substructure model when the analytical expression can be joined to the FEM solution by least squares approximation. The integral of the pressure over the contact area should be equal with the external load.

$$F_W = \int_{A_c} p \cdot dA \quad (5)$$

F_W is the normal load of the surfaces. It can be satisfied if the Δ_{rigid} is a variable.

2. DIMENSIONLESS GAP COORDINATE AND DIMENSION REDUCTION

The equations (1) and (2) consists several integration through the thickness like $\int_{h_1}^{h_2} f(z) dz$ and $\int_{h_1}^z f(\bar{z}) d\bar{z}$ in case of non-Newtonian lubricants or TEHD case. These integrals make the problems to be full 3D case. In order to reduce it to a quasi 2D case the integral domain has to be unified by transformation of the z coordinate.

As usual, it can be assumed that $h_1=0$ and $h_2=h$. In this case let us introduce the dimensionless coordinate ζ along the gap as defined below and let the coordinate z is the linear function of ζ :

$$z = h \left(\frac{1+\zeta}{2} \right); \quad \frac{\partial z}{\partial \zeta} = \frac{h}{2} \quad (6)$$

And consequently the integrals through the lubricant film thickness are:

$$\int_0^h f(z) dz = \frac{h}{2} \int_{-1}^1 f(\zeta) d\zeta; \quad \int_0^z f(\bar{z}) d\bar{z} = \frac{h}{2} \int_{-1}^{\zeta} f(\bar{\zeta}) d\bar{\zeta} \quad (7)$$

So the weighted-integral forms of the energy equation looks like:

$$\int_{A_c} \frac{h}{2} \int_{-1}^1 w_Q \cdot R_{energy} \cdot d\zeta \cdot dA = 0 \quad (8)$$

In this way the integration for the energy equation has to be carry out on a uniformed thickness domain and it makes possible to handle the problem as a quasi thick shell problem where the thickness of the shell is variable.

3. INTEGRATION TROUGH THE THICKNESS BY GAUSS QUADRATURE

In FEM based solutions the integrations are carried out in most cases numerically by means of Gaussian quadrature [4]. If the integral domain is defined through the full thickness $(-1..1)$, the integration above the dimensionless thickness is:

$$\int_{-1}^1 f(\zeta) d\zeta \approx \sum_{i=1}^n w_{G_i} f(\zeta_{G_i}) \quad (9)$$

Where ζ_G are n specified ‘‘Gauss’’ points within the domain of integration and w_G are weights at specified points [4]. The more applied Gauss point, the higher integration accuracy reached but the more computation time needed as well.

Determination of \bar{u}_{xy} and some of the viscosity functions for generalized Reynold equation requires integration above a semi undefined region $(-1.. \zeta)$ that has to be managed as well. Since the function $f(\bar{\zeta})$ can be determined at any point above the gap, let us take the Lagrange interpolation of the integrand above the $\bar{\zeta}(-1..1)$ region through $n+2$ $(f(\bar{\zeta}_s), \bar{\zeta}_s)$ points where $\bar{\zeta}_s = (-1, \zeta_G, 1)$ and n is the number of the perdefined ζ_G Gauss points:

$$f_{Lagr}(\bar{\zeta}) = \sum_{k=1}^{n+2} f(\bar{\zeta}_{S_k}) P_k^{n+1}(\bar{\zeta}) \quad (10)$$

where

$$P_k^{n+1}(\bar{\zeta}) = \prod_{m=1}^{k-1} \frac{\bar{\zeta} - \bar{\zeta}_{S_m}}{\bar{\zeta}_{S_k} - \bar{\zeta}_{S_m}} \prod_{m=k+1}^{n+2} \frac{\bar{\zeta} - \bar{\zeta}_{S_m}}{\bar{\zeta}_{S_k} - \bar{\zeta}_{S_m}} \quad (11)$$

are the $(n+1)$ order Lagrange interpolation polynomials those can be integrated analytically:

$$I_k(\zeta) = \int_{-1}^{\zeta} P_k^{n+1}(\bar{\zeta}) d\bar{\zeta} \quad k = 1..n+2 \quad (12)$$

So the integral with its interpolation:

$$\int_{-1}^{\zeta} f(\bar{\zeta}) d\bar{\zeta} \approx \int_{-1}^{\zeta} \sum_{k=1}^{n+2} f(\bar{\zeta}_{S_k}) P_k^{n+1}(\bar{\zeta}) d\bar{\zeta} = \sum_{k=1}^{n+2} f(\bar{\zeta}_{S_k}) I_k(\zeta) \quad (13)$$

4. QUASI 2D ELEMENT AND NUMERICAL INTEGRATION

Since the coordinate “ z ” has been transferred to a dimensionless “ ζ ” coordinate, and the $(0..h)$ range to $(-1..1)$, furthermore and the $h(x,y)$ gap size independent from z , only the contact area has to be divided into shapes characteristic of a particular 2D element type and then derived into a unified shape by means of conform transformation for numerical integration [4] in order to carry out the integrations.

$$\int_{A_c} f(x,y) dx dy = \sum_e \int_{A_c^e} f^e(x,y) dx dy = \sum_e \int_{-1}^1 \int_{-1}^1 f(x^e(\xi,\eta), y^e(\xi,\eta)) |\mathbf{J}| d\xi d\eta \quad (14)$$

Conform geometry transformation by Legendre shape functions (N) according to [4] looks like:

$$x^e(\xi,\eta,t) = \sum_i X_i^e(t) N_{x_i}^e(\xi,\eta) = \mathbf{N}_x^{eT}(\xi,\eta) \mathbf{X}^e(t) \quad (15)$$

$$y^e(\xi,\eta,t) = \sum_j Y_j^e(t) N_{y_j}^e(\xi,\eta) = \mathbf{N}_y^{eT}(\xi,\eta) \mathbf{Y}^e(t) \quad (16)$$

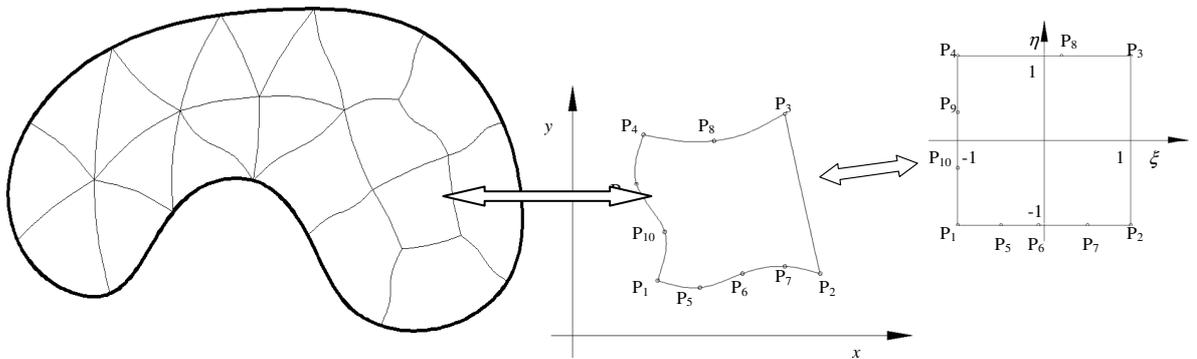


Figure 2 Mesh transformation

This integration is carried out in most cases numerically by means of Gaussian quadrature [4]:

$$\int_{-1}^1 \int_{-1}^1 f(\xi, \eta) \mathbf{J} |d\xi d\eta| = \sum_{i=1}^n \sum_{j=1}^m w_{G_i} w_{G_j} f(\xi_{G_i}, \eta_{G_j}) \mathbf{J}(\xi_{G_i}, \eta_{G_j}) \quad (17)$$

Where ξ_G and η_G specified points within the domain of integration and w_G are weights at specified points [4].

Legendre shape functions (\mathbf{N}) according to [4] have been used for the polynomial approximation of the un-known variables. Only 2D approximation needed for the gap size, deformation and the pressure.

$$h_g^e(\xi, \eta, t) = \sum_k H_{g_k}^e(t) N_{h_k}^e(\xi, \eta) = \mathbf{N}_g^{eT}(\xi, \eta) \mathbf{H}_g^e(t) \quad (18)$$

$$\delta_s^e(\xi, \eta, t) = \sum_k H_{\delta_s k}^e(t) N_{\delta_s k}^e(\xi, \eta) = \mathbf{N}_s^{eT}(\xi, \eta) \mathbf{H}_{\delta_s}^e(t) \quad s=1,2 \quad (19)$$

$$h^e = \left[\mathbf{N}_g^{eT}, 1 \right] \begin{bmatrix} \mathbf{H}_g^e + \mathbf{H}_{\delta_1}^e + \mathbf{H}_{\delta_2}^e \\ \Delta_{rigid} \end{bmatrix} = \mathbf{N}_h^{eT}(\xi, \eta) \mathbf{H}^e(t) \quad (20)$$

$$p^e(\xi, \eta, t) = \sum_l P_l^e(t) N_{p_l}^e(\xi, \eta) = \mathbf{N}_p^{eT}(\xi, \eta) \mathbf{P}^e(t) \quad (21)$$

The variation of the temperature through the thickness has been taken into consideration:

$$\vartheta^e(\xi, \eta, \zeta, t) = \sum_m T_m^e(t) N_{\vartheta_m}^e(\xi, \eta, \zeta) = \mathbf{N}_{\vartheta}^{eT}(\xi, \eta, \zeta) \mathbf{T}^e(t) \quad (22)$$

Let us note that only the shape functions for the surface nodes, edges and sides of the elements of \mathbf{N}_{ϑ} on surfaces S_i assume values. Thus the shape functions may be divided into three groups: those related to surfaces S_1 and S_2 plus the shape function operating inside the lubricant.

$$\mathbf{N}_{\vartheta}^T = \left[\mathbf{N}_{\vartheta S_1}^T, \mathbf{N}_{\vartheta V}^T, \mathbf{N}_{\vartheta S_2}^T \right] \quad (23)$$

Accordingly, \mathbf{T} may also be grouped similarly:

$$\mathbf{T}_{\vartheta}^T = \left[\mathbf{T}_{S_1}^T, \mathbf{T}_V^T, \mathbf{T}_{S_2}^T \right] \quad (24)$$

No shape function is required for the displacement like a rigid body $\Delta_{rigid}(t)$, as it is a parameter associated with the body. For the discretisation of the weak integral form of the Reynolds equations, the w_R weight functions are \mathbf{N}_p in case of direct solution. If inverse solution is chosen the w_R weight function should be \mathbf{N}_g . However it has to be considered that the pressure and deformation field are dependent from each other. The two fields are connected by the solid mechanical description of the surfaces. Furthermore the pressure distribution has to satisfy the load case as well. For the discretization of the energy equation w_Q weight functions are \mathbf{N}_{ϑ} .

5. VERIFICATION OF DEVELOPED METHOD

The solution of the problem by the p-version finite element method is presented by means of the examples found in the article published by Wolff at all [5] in 1992 as the basis for which the applicability of the solution method constructed here to the problem has been verified. The gap was divided along its length into 15 elements also here. The degree of approximations is given in Table 1.

Table 1 Mesh parameter

Element number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Degree of pressure approximation	6	6	6	6	6	6	6	6	7	7	7	6	6	6	6
Degree of temperature approximation	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4

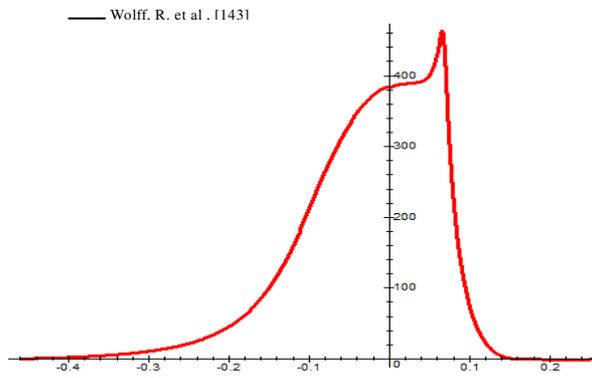


Figure 3 Pressure distribution for pure rolling

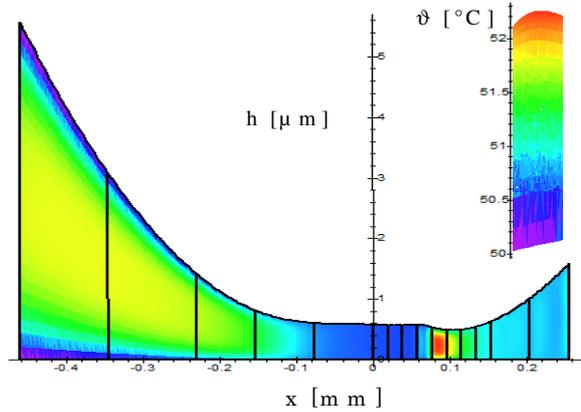


Figure 4 Temperature distribution for pure rolling

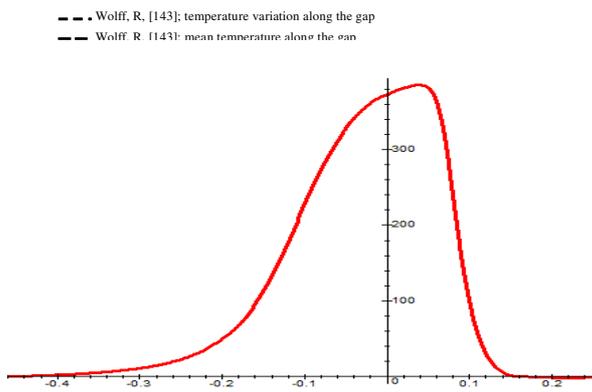


Figure 5 Pressure distribution with $S=1.9$

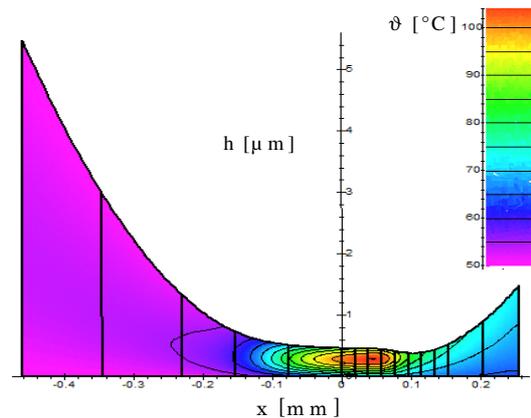


Figure 6 Temperature distribution with $S=1.9$

The calculations were carried out for the state of pure rolling contact and with 1.9 sliding ratio. The elasto-hydrodynamic problem was solved with the use of the optimized Newton-Rapshon method [3] and the thermodynamical problem by the attenuated direct algorithm in iterative manner. The pressure distribution obtained is shown in Figure 3 and Figure 5. The gap size formed as well as the temperature distribution in Figure 4 and Figure 6.

6. IMPLEMENTATION OF EHD PROBLEM TO FEM SOFTWARE

The Comsol Multiphysics software was used for calculating EHD problems. The Comsol Multiphysics uses the finite element formulation with Lagrange test functions to solve numerical problems. The weak formulation of the hydrodynamic problem can be created in the Mathematics module and model can be freely modified. The elastic deformation of the surface and the rigid displacement of the surfaces can be calculated in the Structural Mechanics module which uses the common structural finite element methods. Since optimized Newton-Rapshon method [3] cannot be adopt to Comsol Multiphysics the solution has been stabilized be Stream-line-upwind/Petrov-Galjorkin and isotropic diffusion method. The results can be seen in Figure 7 and Figure 8.

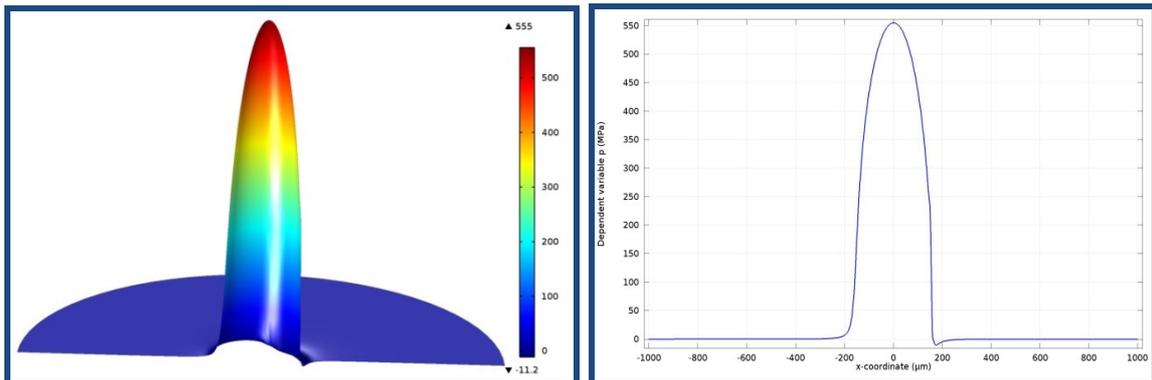


Figure 7 Pressure distribution of point contact

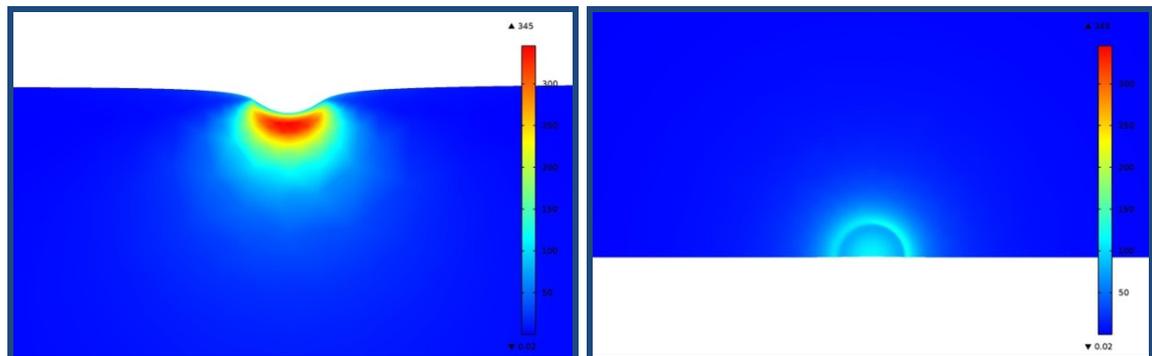


Figure 8 Surface deformation and subsurface stress distribution

7. CONCLUSION

For the three-dimensional contact problem of lubrication, a two-dimensional lubrication fluid film finite element was developed. A remarkable property of this element is that only a two-dimensional mesh has to be maintained. Furthermore, pressure and film thickness can be handled as independent element variables. Integration through the thickness is carried out by making use of dimensionless thickness coordinate. Three dimensional behaviour of the fluid film temperature can be modelled using higher order approximations through the thickness direction. The method has been verified by line contact and the EHD part has been already implemented to commercial FEM software. Implementation of the thermal part is under development.

8. ACKNOWLEDGEMENTS

The research was supported by the European Union and the State of Hungary, co-financed by the European Social Fund in the framework of TÁMOP-4.2.4.A/2-11/1-2012-0001 'National Excellence Program' and National Research, Development and Innovation Office - NKFIH, K115701.

9. REFERENCES

- [1] CARSLAW, H. S., JAEGER, J. C., *Conduction of Heat in Solids*, Oxford University Press, 1959.
- [2] JOHNSON, K. L., *Contact Mechanics*, 2nd Ed., Cambridge Univ. Press, (1987).
- [3] SZÁVAI, SZ., KOVÁCS, S., *P-version FEM model of TEHD lubrication and its implementation to study surface modified contact bodies behaviour*, BALKANTRIB'14: Proceedings, Sinaia, Romania, 2014. pp. 716-727.
- [4] PÁCZELT, I., *Finite Element Method in Engineering Practice I. Part (Végelem-módszer a Mérnöki Gyakorlatban I. Kötet)*, Miskolci Egyetemi kiadó, Miskolc, 1999.
- [5] WOLFF, R., NONAKA, T., KUBO, A., MATSUO, K., *Thermal Elastohydrodynamic Lubrication of Rolling/Sliding Line Contacts*, ASME J. of Tribology, Vol. 114. No. 4, 1992, pp. 706-713.